


MODEL DESCRIPTION SAMPLE MODEL NO. T-007-W-04-05-SU-52-00-GG-F

FRAME HARDWARE	T - FILTER EXTRACTION CLIPS	<input type="checkbox"/> T <input type="checkbox"/> -
FILTER MEDIUM	007 - 99.97% AT 0.3µm WATER RESISTANT GLASS	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> -
	011 - 99.97% AT 0.3µm FLATSHEET	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> -
PACK STYLE	W - 11" PUREFORM	<input type="checkbox"/> <input type="checkbox"/> -
	H - ALUMINUM SEPARATORS	<input type="checkbox"/> <input type="checkbox"/> -
FRAME MATERIAL	01 - 3/4" NON F. R. PLYWOOD	<input type="checkbox"/> <input type="checkbox"/> -
	04 - 3/4" F. R. PLYWOOD	
	07 - 3/4" F. R. PARTICLEBOARD	
	11 - 3/4" NON F. R. PARTICLEBOARD	
FRAME STYLE	05 - FLUID SEAL STYLE	<input type="checkbox"/> 0 <input type="checkbox"/> 5 <input type="checkbox"/> -
PACK SEALANT	SOLID URETHANE FIRE RETARDANT	<input type="checkbox"/> S <input type="checkbox"/> U <input type="checkbox"/> -
GASKET MATERIAL LOCATION	00 - NONE	<input type="checkbox"/> <input type="checkbox"/> -
	51 - SILICONE BLU-JEL UPSTREAM	
	52 - SILICONE BLU-JEL DOWNSTREAM	
	61 - URETHANE GEL UPSTREAM	
	62 - URETHANE GEL DOWNSTREAM	
FACEGUARD MATERIAL LOCATION	00 - NONE	<input type="checkbox"/> <input type="checkbox"/> -
	11 - GALVANIZED UPSTREAM	
	12 - GALVANIZED DOWNSTREAM	
	13 - GALVANIZED BOTH SIDES	
	21 - STAINLESS STL. UPSTREAM	
	22 - STAINLESS STL. DOWNSTREAM	
	23 - STAINLESS STL. BOTH SIDES	
SIZE CODE	GG-F - EXAMPLE SEE CHART	<input type="checkbox"/> <input type="checkbox"/> - <input type="checkbox"/> F

SIZE DESIGNATORS & RATED FLOW @ 1.35" W.G.

SIZE CODE	FILTER SIZE		RATED FLOW(CFM)
	HEIGHT	WIDTH	
CC-F	12"	12"	430
YU-F	23-3/8"	11-3/8"	865
GC-F	24"	12"	920
GE-F	24"	18"	1380
YY-F	23-3/8"	23-3/8"	1900
GG-F	24"	24"	2000
GN-F	24"	30"	2500

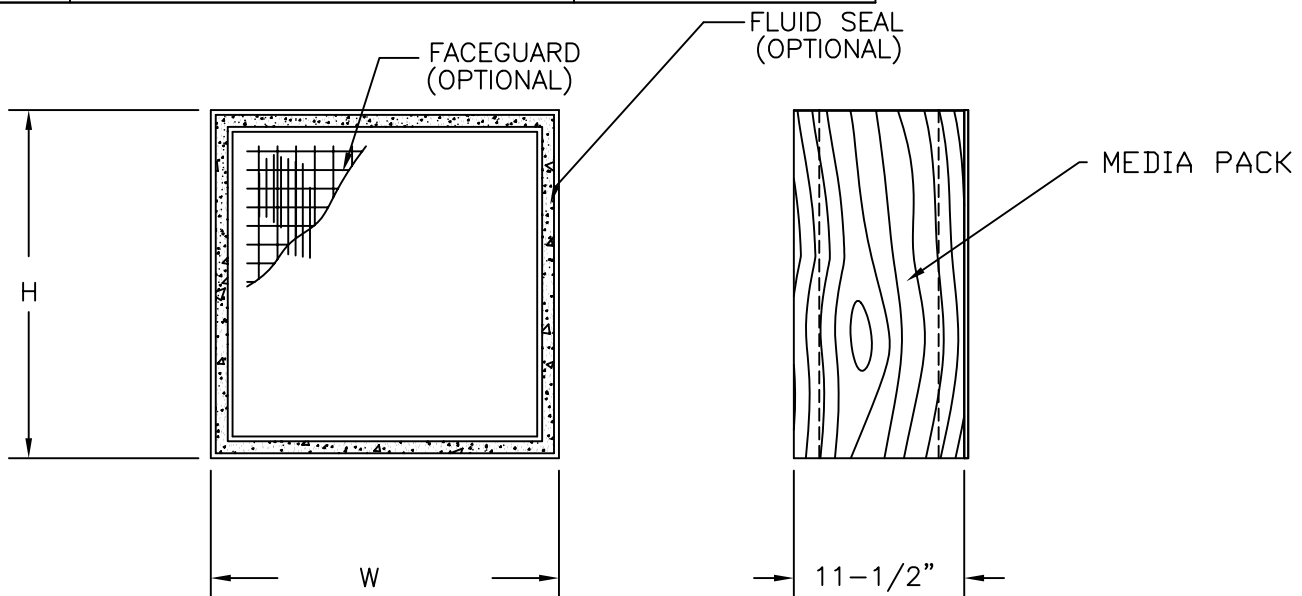

SPECIFICATIONS:

1. THE HEIGHT AND WIDTH TOLERANCE IS +0 / -1/8", SQ W/IN 1/8
2. THE DEPTH TOLERANCE IS +1/16" / -0
3. THE FILTER EFFICIENCY IS 99.99% AT 0.3 m AT THE RATED FLOW
4. THE FILTER RESISTANCE IS 1.35" W.G. MAXIMUM AT THE RATED FLOW
5. THE FILTER SHALL BE SCAN TESTED AT 90 FPM ±10% WITH AN APPROVED AEROSOL FOR LEAKS.
6. THE MAXIMUM TEMPERATURE EXPOSURE IS 250° F
7. THE MAXIMUM R.H. IS 100%
8. CLASSIFIED BY UNDERWRITERS LABORATORIES TO FLAMMABILITY ONLY UL 900 CLASS 1.

TITLE:  
ALPHA 2000, WOOD FRAME, 99.99% EFFICIENT, FLUID SEAL

**Flanders**<sup>®</sup>  
FLANDERS FILTERS, INC.

DRAWING NO.  
AC-16

CUSTOMER NAME: \_\_\_\_\_  
PROJECT NAME: \_\_\_\_\_  
PO NUMBER: \_\_\_\_\_