


24" X 24" X 2"
FRAME ONLY. SPECIFIED BY PRECISIONCELL II MODEL NUMBER. SEE DRAWING FOR DIMENSIONS.

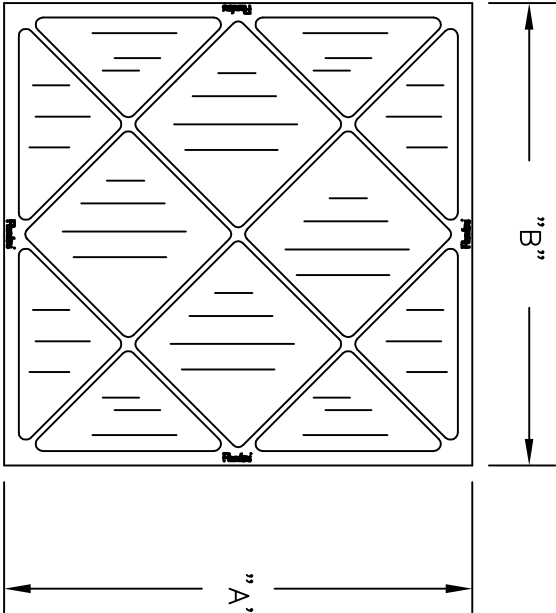

65% PCELL II MODEL NUMBER	NOMINAL SIZE	ACTUAL SIZE		MEDIA AREA (SQ. FT.)	PRESSURE DROP AND AIRFLOW @ 500 FPM			
		"A"	"B"		2"	4"	CFM	
86655, 0*2424	24 X 24 X *	23 3/8"	23 3/8"	53	114	0.7	0.55	2000
86655, 0*1224	24 X 12 X *	23 3/8"	11 3/8"	26	55	0.7	0.55	1250
86655, 0*2024	24 X 20 X *	23 3/8"	19 3/8"	44	94	0.7	0.55	1400
86655, 0*1824	24 X 18 X *	23 3/8"	17 3/8"	39	85	0.7	0.55	1500
86655, 0*2020	20 X 20 X *	19 3/8"	19 3/8"	40	78	0.7	0.55	1400
86655, 0*2025	25 X 20 X *	24 3/8"	19 3/8"	46	98	0.7	0.55	1750
86655, 0*1625	25 X 16 X *	24 3/8"	15 3/8"	29	62	0.7	0.55	1400
86655, 0*1620	20 X 16 X *	19 3/8"	15 3/8"	36	78	0.7	0.55	1100

EXAMPLE OF MODEL NO. : 86655, 022424

MODEL NO. 86655, QTY: _____

MODEL NO. 86655, QTY: _____

MODEL NO. 86655, QTY: _____

MODEL NO. 86655, QTY: _____

- NOTES:**
1. FILTER TO BE RATED AT 65% IN ACCORDANCE WITH ASHRAE STANDARD 52.1-92.

2. FRAME-HIGH WET STRENGTH 28 POINT CLAY COATED BEVERAGE BOARD.
3. MEDIA-WET LAID MICRO FIBERGLASS.
4. ADHESIVE-WHITE GLUE UTILIZED TO ATTACH STRAPS TO MEDIA AND FRAME TO FRAME.
5. CLASSIFIED BY UL AS TO FLAMMABILITY ONLY. CLASS 2

CUSTOMER _____

CUSTOMER ORDER NO. _____

FLANDERS ORDER NO. _____

TITLE: FLANDERS PRECISIONCELL II
60-65%

Flanders PRECISIONAIRE

DRAWING NO. PCELL II 65%

REV. _____