


24" X 24" X 2"  
THIS FILTER MEETS THE REQUIREMENTS OF THE ASHRAE STANDARD 52.1-1992

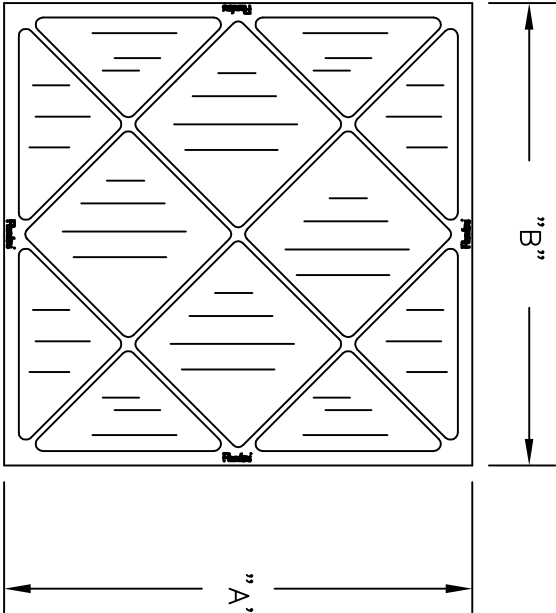

85% PCELL II MODEL NUMBER	NOMINAL SIZE	ACTUAL SIZE		MEDIA AREA (SQ. FT.)	PRESSURE DROP AND AIRFLOW @ 500 FPM		
		"A"	"B"		2"	4"	CFM
88655, 0*2424	24 X 24 X *	23 3/8"	23 3/8"	53	1.0	0.70	2000
88655, 0*1224	24 X 12 X *	23 3/8"	11 3/8"	26	1.0	0.70	1250
88655, 0*2024	24 X 20 X *	23 3/8"	19 3/8"	44	1.0	0.70	1400
88655, 0*1824	24 X 18 X *	23 3/8"	17 3/8"	39	1.0	0.70	1500
88655, 0*2020	20 X 20 X *	19 3/8"	19 3/8"	40	1.0	0.70	1400
88655, 0*2025	25 X 20 X *	24 3/8"	19 3/8"	46	1.0	0.70	1750
88655, 0*1625	25 X 16 X *	24 3/8"	15 3/8"	29	1.0	0.70	1400
88655, 0*1620	20 X 16 X *	19 3/8"	15 3/8"	36	1.0	0.70	1100

EXAMPLE OF MODEL NO. : 88655, 022424

MODEL NO. 88655, QTY: \_\_\_\_\_

MODEL NO. 88655, QTY: \_\_\_\_\_

MODEL NO. 88655, QTY: \_\_\_\_\_

MODEL NO. 88655, QTY: \_\_\_\_\_

- NOTES:**
1. FILTER TO BE RATED AT 85% IN ACCORDANCE WITH ASHRAE STANDARD 52.1-92.

2. FRAME-HIGH WET STRENGTH 28 POINT CLAY COATED BEVERAGE BOARD.
3. MEDIA-WET LAID MICRO FIBERGLASS.
4. ADHESIVE-WHITE GLUE UTILIZED TO ATTACH STRAPS TO MEDIA AND FRAME TO FRAME.
5. CLASSIFIED BY UL AS TO FLAMMABILITY ONLY, CLASS 2

CUSTOMER \_\_\_\_\_

CUSTOMER ORDER NO. \_\_\_\_\_

FLANDERS ORDER NO. \_\_\_\_\_

TITLE: FLANDERS PRECISIONCELL II  
80-85%

**Flanders** Precisionaire

FLANDERS PRECISIONAIRE

DRAWING NO. PCELL II 85%

REV. \_\_\_\_\_